




# ENTRUST



**YOUR FLOORING TO US**  
GLUE DOWN

# PRODUCT STRUCTURE

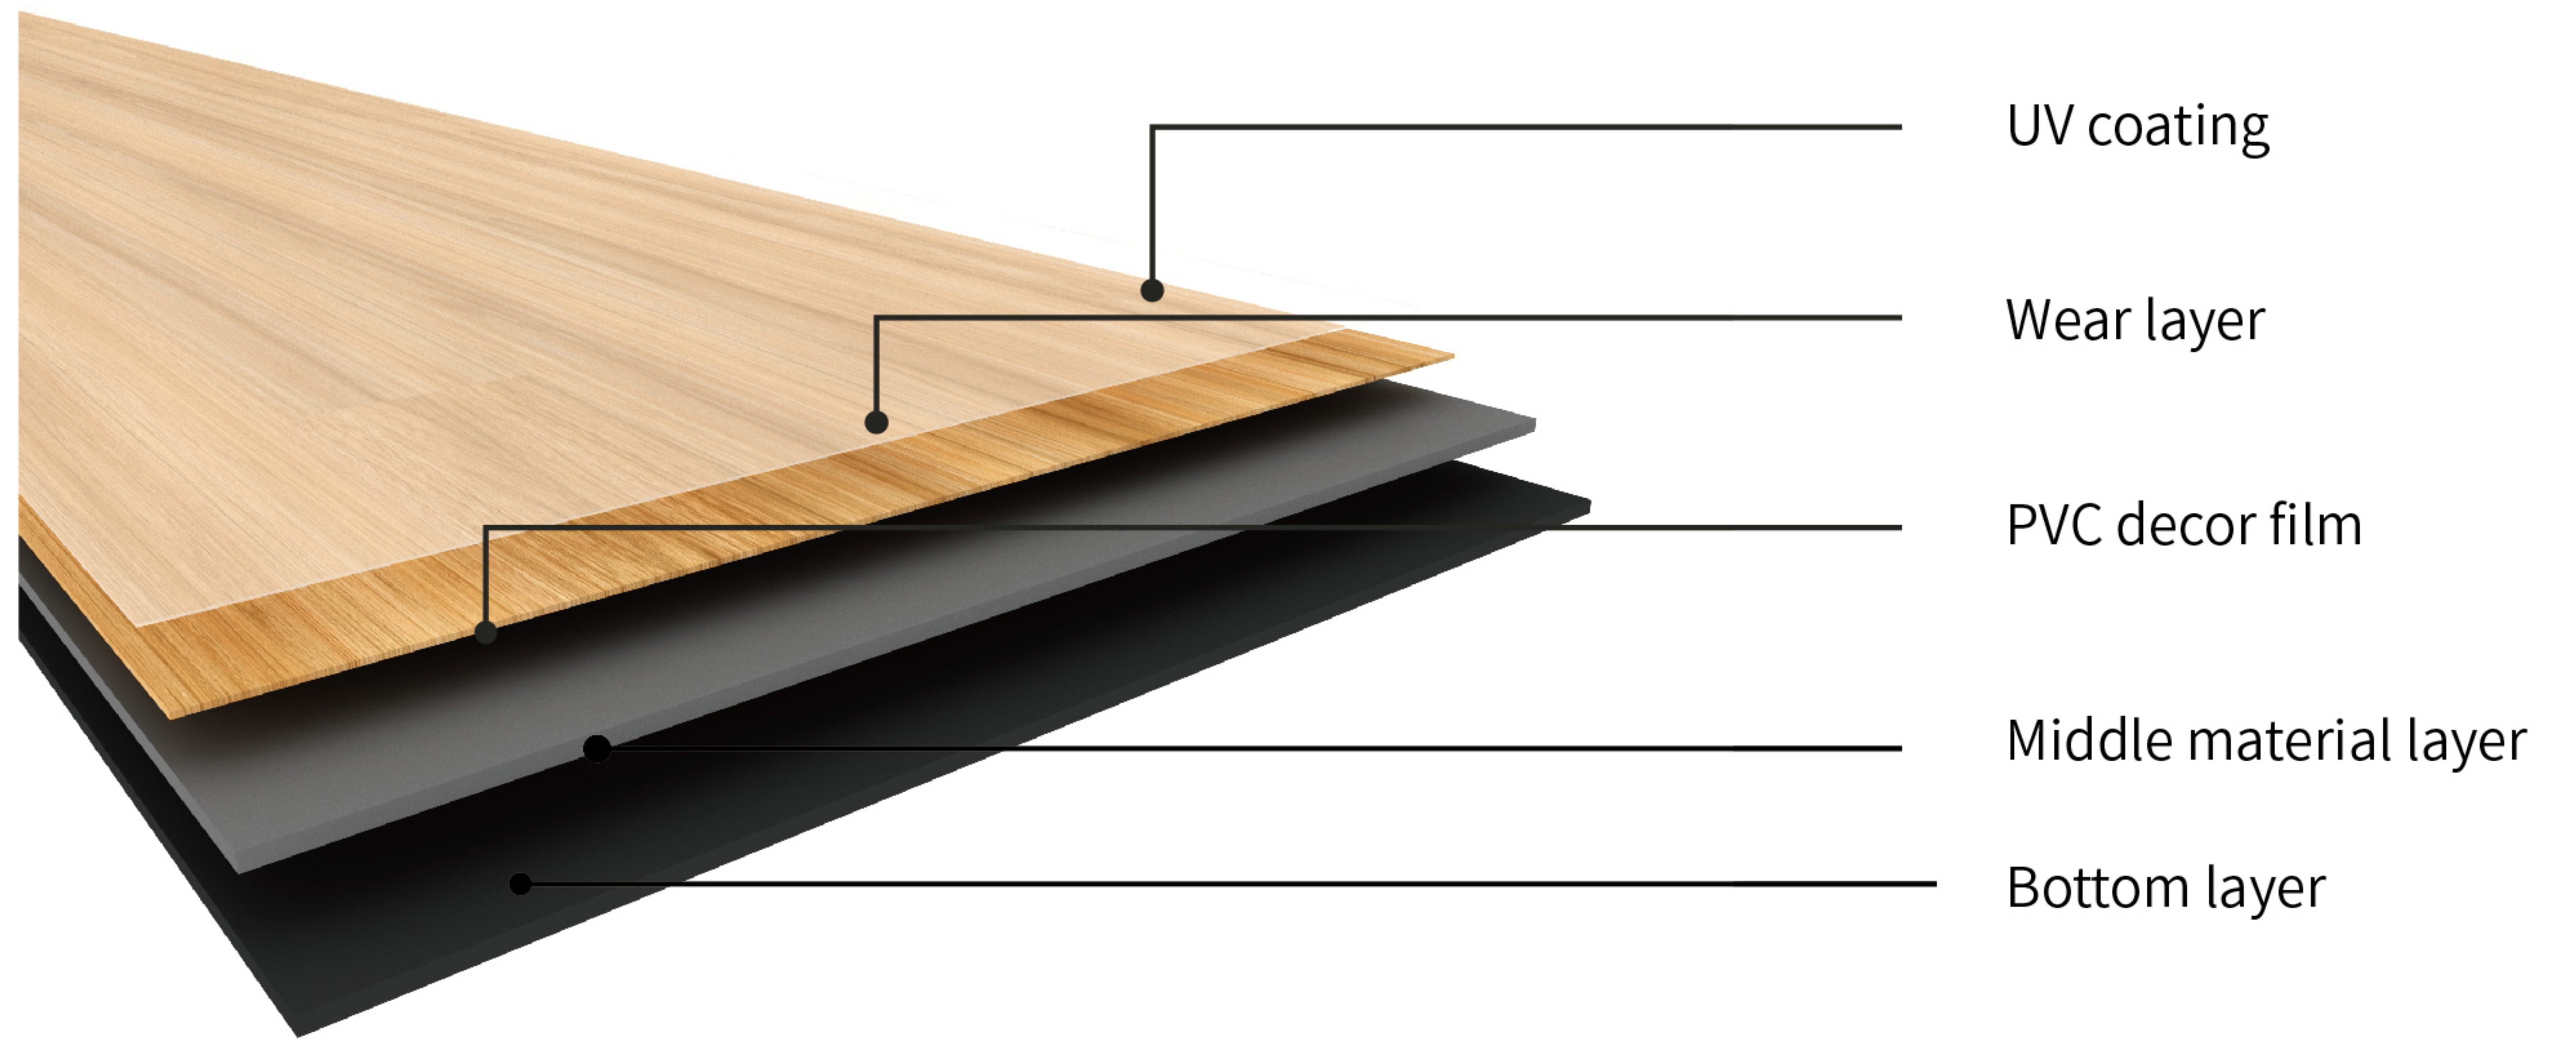

**ENT301 Light Honey Oak**



**ENT302 Natural Collage Oak**



**ENT303 White Giant Oak**



**ENT304 Honey Elegant Oak**



**ENT305 Grey Giant Oak**



**ENT306 Grey Seagrass Oak**



**ENT307 Chocolate Collage Oak**



**ENT308 Silver Grey Oak**




Phthalate Free  
Non-Toxic Plasticiser



Convenient maintenance



Formaldehyde Free

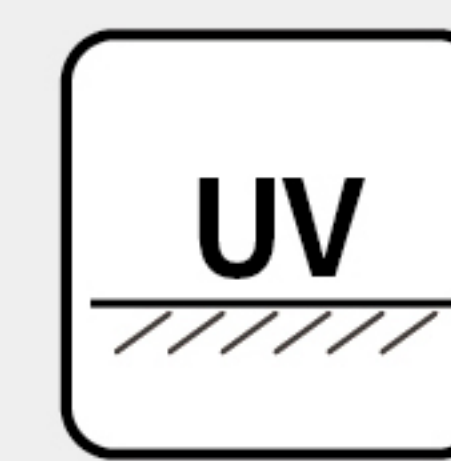


Ultraviolet Protection Coat  
To Slow Down Color Deterioration



Superior Stain Resistance




Superior Scratch Resistance

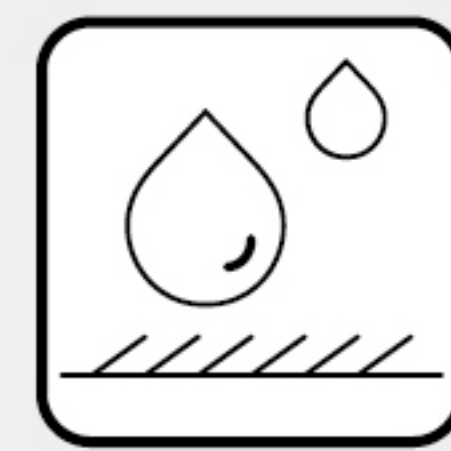

100% Waterproof Material



Walking Comfort

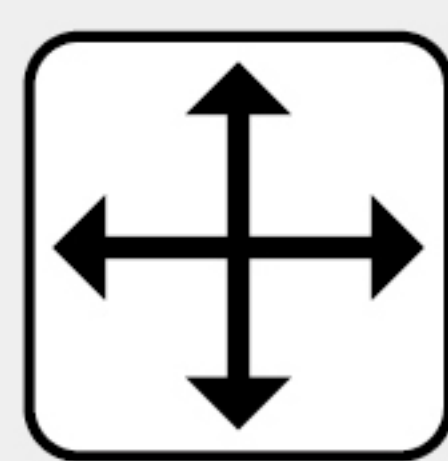

Extremely Stable  
Slightest Contraction or Expansion



28 Days TVOC-Pass  
Tested and Certified by setsco



Silent Floor



Inflammation retarding



Anti-Slip  
R10 level



Resilient & Flexible

# TECHNICAL DATA

Product Specification				
Item	-----	Unit	Requirement	Result
Total Thickness	-----	MM	----	3.0mm
Wear Layer	-----	MM	----	0.3mm
Surface treatment	-----	MM	----	PUR
Size(Length x Width)	-----	----	----	187×1227mm

Technical Characteristics				
EN standard Temperature:23℃±2℃ EN standard Humidity:50%±5%				
Item	Standard	Unit	Result	
Length/Width	EN ISO 24342	mm	≤0.13% ≤0.50mm	
Squareness/Straightness	EN ISO 24342	mm	≤0.25mm	
Total thickness	EN ISO 24346	mm	±0.15mm	
Wear layer	EN ISO 24340	mm	±0.02mm	
Middle/back layer	EN ISO 24340	mm	±0.01mm	
Total mass per unit area	EN 430	----	Nominal value +13% / -10%	
Peeling Strength of layer	EN 431	----	>50N/50mm	
Residual indentation(average)	EN 433	mm	<0.1	
Sound,impact,reduction	EN ISO 717-2	dB	>4.8	
Fire Resistance	EN 13501-1	----	Bfl-S1	
Slip resistance	DIN51130	----	R10	
Dimension stability after exposure to heat	EN 434	%	<0.25	
Curling after exposure to heat	EN 434	mm	<1.2mm	
Color fastness to light	EN ISO 105 B02	----	grade>6	
Loss on heating	JIS A5705	----	<0.5%	
Change in length to water absorption	JIS A5705	mm	<0.20mm	
Flexibility	EN 435	----	pass	



30 Year Limited Residential Warranty Against Manufacturing Defects



10 Year Limited Commercial Warranty Against Manufacturing Defects



064-069-3844 Environmentally Preferred Flooring



CERTIFIED BY SCS Global Services



**ENTRUST ORGANISATION PTE LTD**

Tel: 68946652

Fax: 68932015

E-mail: [info@entrust-org.com](mailto:info@entrust-org.com)